

DDX-VP-540C

High Resolution Color Day/Night Dome Camera





Features:

- Provides crystal clear image at low illumination (0.003 Lux)
- Day/Night auto switching
- SONY 1/3" Super HAD CCD Sensor
- High resolution at 540 TVL
- Built-in Digital Noise Reduction (DNR) function
- Built-in OSD setup menu with on-board 5 push buttons
- 4.0 ~ 9.0 mm DC drive Vari-focal Auto-Iris lens
- Vandal proof / weather proof (IP66) housing
- 3-Axis bracket design for easy installation

Specifications:

Image Inductor	SONY 1/3" Super HAD CCD Sensor
Resolution	811(H) x 508(V) (410,000 pixels)
Horizontal	540 TVL
Maximum Aperture Ratio	1 : 1.3 ~ 2.0
Scan System	2 : 1 Interlaced
Synchronization	Internal / Line Lock selectable
Electronic Shutter Speed	1/60 ~ 1/120,000 sec
Gain Control	AGC-L, AGC-H, OFF selectable
Sense-Up	Auto/Off selectable
White Balance	W-ATW/S-ATW/AWC/Manual selectable
Min. Illumination	0.003 Lux (Sense-up) / 0.3 Lux (F1.3)
S/N (Y Signal)	50 dB (Weight On)
Digital Noise Reduction (DNR)	On / Low / Middle / High selectable
Motion Detection	On / Off selectable
On Screen Display (OSD) Menu	Built-in
Privacy Function	On / Off (4 Programmable zoon)
Video Output	Composite Video 1.0 Vp-p 75 Ohm
Operation Temperature	14° ~ 122° F
Operation Humidity	30% ~ 90 % RH
Lens	4.0 ~ 9.0 mm DC Drive Vari-focal Auto-Iris
Power Supply	DC 12 V

DIMENSION

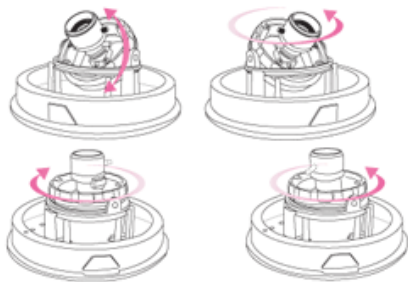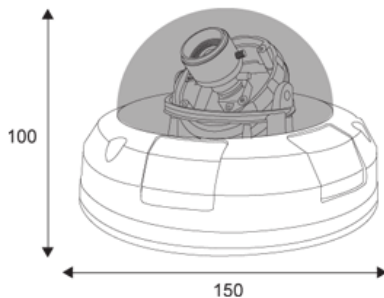

3-Axis

Matco, Inc.

649 S. Vermont St.
Palatine, IL 60067
U.S.A.

Phone: (847) 202-0010
Fax: (847) 202-0018
Email: EverSecure@matco.com
www.matco.com